



# FiltraPress SW17-36

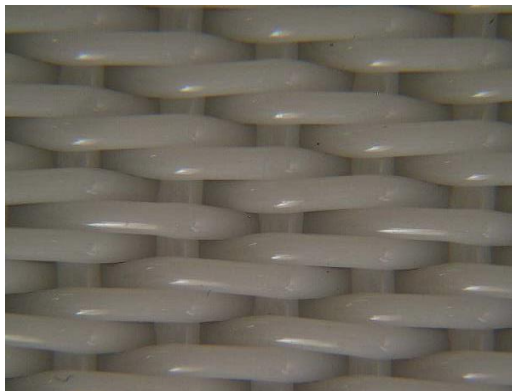

*strona osadów*

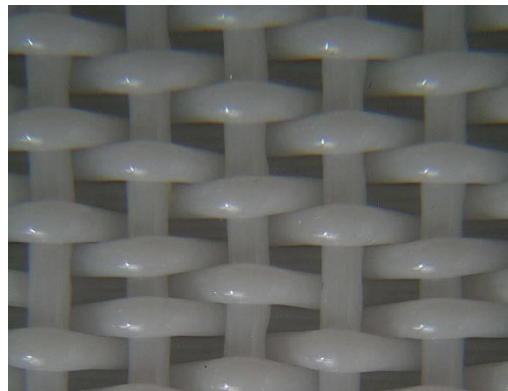

*odwrotna strona*


splot		diagonalny 2/1
osnowa		0,7 mm PET
wątek		0,8 mm PET
ilość (osnowa)	(1/cm)	16,5
ilość (wątek)	(1/cm)	5,0
przepuszczalność powietrza	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	3200 400
grubość	(mm)	1,98
waga	(g/m <sup>2</sup> )	1383
połączenie		Klejona nierdzewna Szew tkaniny (taśma bez końca) Połączenie pierścieniowe

## Charakterystyka produktu:


Tkanina filtracyjna do prasy taśmowej

Dostępność: Zwykle w magazynie

# FiltraPress SW22-47

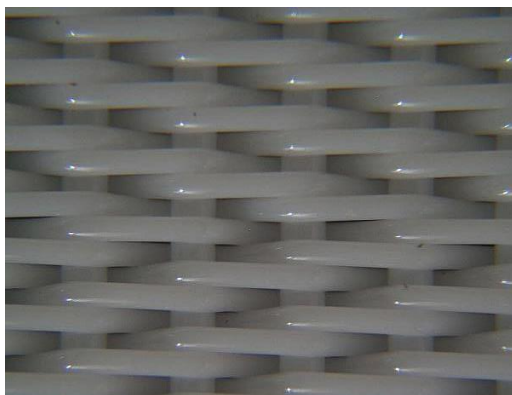

*strona osadów*

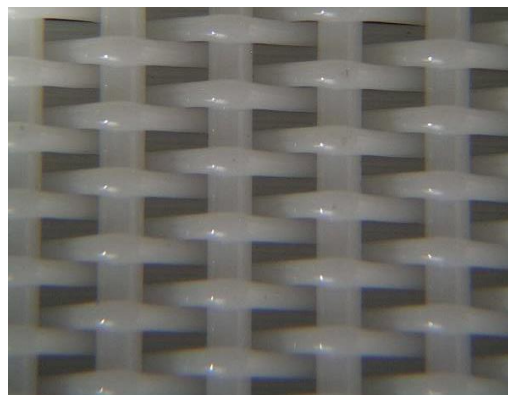

*odwrotna strona*



splot		diagonalny 2/1
osnowa		0,5 mm PET
wątek		0,9 mm PET
ilość (osnowa)	(1/cm)	21,6
ilość (wątek)	(1/cm)	5,2
przepuszczalność powietrza	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	4800 590
grubość	(mm)	1,83
waga	(g/m <sup>2</sup> )	1196
połączenie		Klejona nierdzewna Szew tkany (taśma bez końca)

## Charakterystyka produktu:

Tkanina filtracyjna do prasy taśmowej

Dostępność: Zwykle w magazynie

# FiltraDrain A7-68

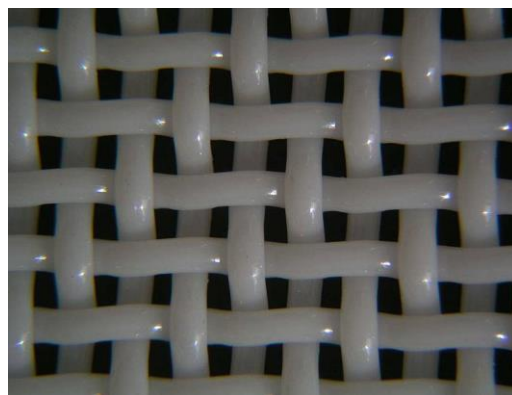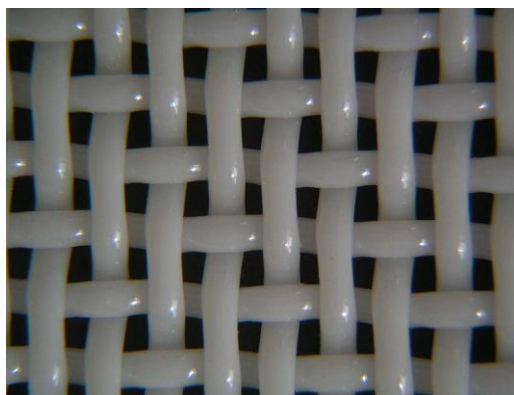

*Strona osadów*

splot		diagonalny 2/1
osnowa		0,9 mm PET
wątek		0,9 mm PET
ilość (osnowa)	(1/cm)	6,7
ilość (wątek)	(1/cm)	5
przepuszczalność powietrza	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	5509 680
grubość	(mm)	2,01
waga	(g/m <sup>2</sup> )	1133
połączenie		Klejona nierdzewna Szew tkany (taśma bez końca) Połączenie pierścieniowe


## Charakterystyka produktu

Bardzo dobra zdolność odpływu wody

Bardzo dobrze się czyści

Dostępność: Zwykle w magazynie

# Spiral F

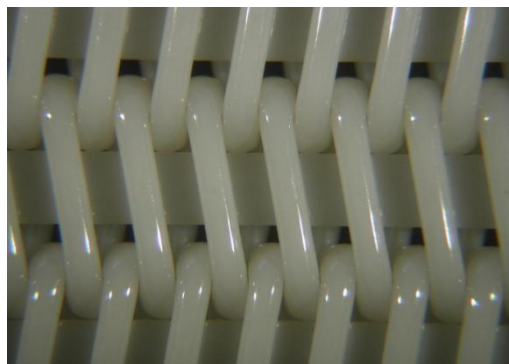


Weave		Spiral
Warp		0,68 mm PET
Weft		0,9 mm PET
Number of Warps	(yarns/cm)	7,2
Number of Wefts	(yarns/cm)	1,8
Air permeability	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	3240 - 5670 400 - 700
Caliper	(mm)	2,7
Square weight	(g/m <sup>2</sup> )	1650
Seams		Spiral

## Product description:

Filtration spiral fabric with middle air permeability.

# Spiral F

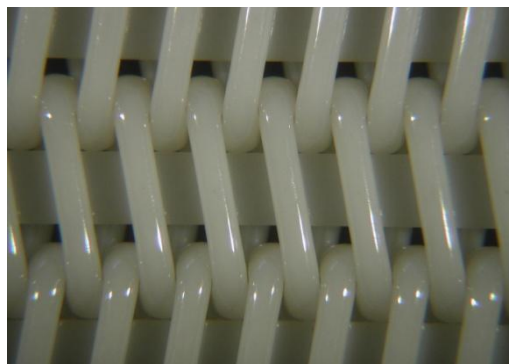


Weave		Spiral
Warp		0,68 mm PET
Weft		0,9 mm PET
Number of Warps	(yarns/cm)	7,2
Number of Wefts	(yarns/cm)	1,8
Air permeability	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	3240 - 5670 400 - 700
Caliper	(mm)	2,7
Square weight	(g/m <sup>2</sup> )	1650
Seams		Spiral

**Product description:**

Filtration spiral fabric with middle air permeability.

# Spiral F

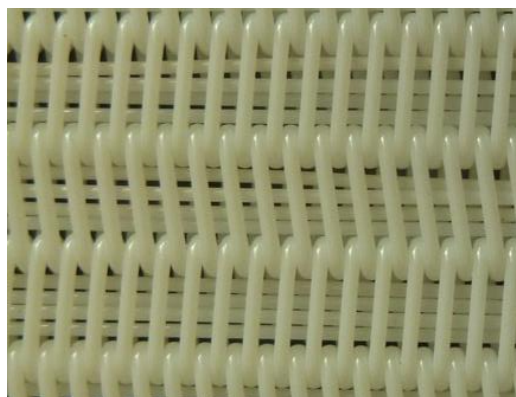

*Product photo*

Version		4 round fillers
Spiral yarn diameter		0,68 mm PET
Cross direction yarn diameter		0,9 mm PET
Number of spiral yarns	(yarns/cm)	7,2
Number of cross direction yarns	(yarns/cm)	1,9
Air permeability	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	4000 - 4400 500 - 550
Thickness	(mm)	2,4
Square weight	(g/m <sup>2</sup> )	1730
Available seams		Spiral

Product description:


Standard filtration spiral fabric with middle air permeability.

Availability: usually in stock

# FiltraPress E27-32



*strona osadów*

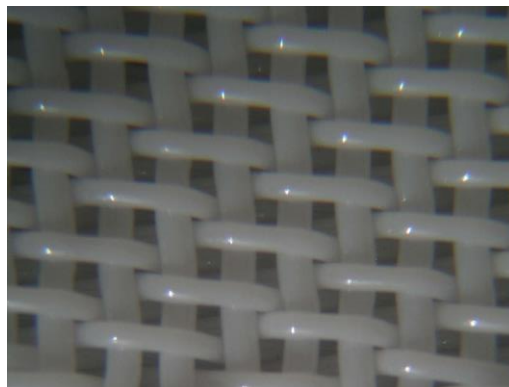

*odwrotna strona*


splot		atlas 6/2
osnowa		0,5 mm PET
wątek		0,9 mm PET
ilość (osnowa)	(1/cm)	27
ilość (wątek)	(1/cm)	7,1
przepuszczalność powietrza	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	2430 - 2840 300 - 350
grubość	(mm)	2,26
waga	(g/m <sup>2</sup> )	1553
połączenie		Klejona nierdzewna Szew tkaniny (taśma bez końca)

## Charakterystyka produktu:


Tkanina filtracyjna do prasy taśmowej

Dostępność: Zwykle w magazynie

# FiltraPress HD17-54PA

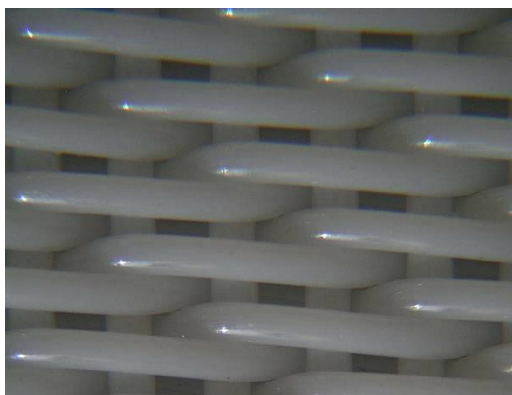

*Cake side*

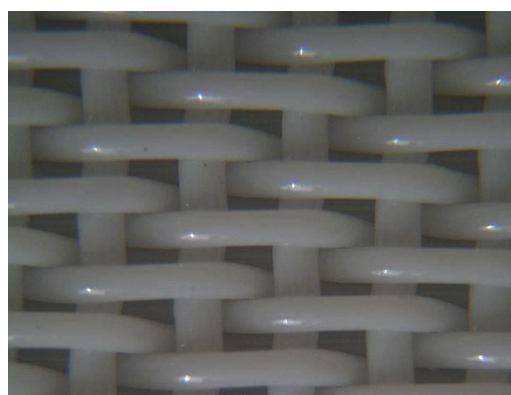

*Back side*

Weave		Twill 3/2
Warp		0,7 mm PA
Weft		1,05 mm PET
Number of Warps	(yarns/cm)	16,8
Number of Wefts	(yarns/cm)	5
Air permeability	l/m <sup>2</sup> /s (200 Pa) CFM (125 Pa)	4400 540
Thickness	(mm)	2,43
Square weight	(g/m <sup>2</sup> )	1486
Available seams		Stainless Steel Clipper Woven (endless belt)


Product description:

Filtration fabric for belt filter press.

Availability: usually in stock



# SpiralHD - ExtraLife

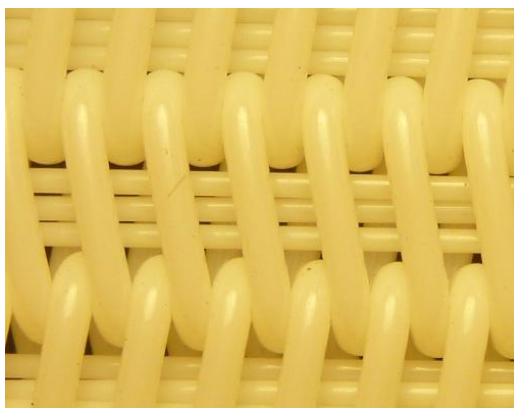


*Product photo*

Version	3 round fillers	
Spiral yarn diameter	1,10 mm modified PET (high abrasion resistance)	
Cross direction yarn diameter	0,9 mm PET	
Number of cross direction yarns (yarns/cm)	2,0	
Air permeability	l/m <sup>2</sup> /s (200 Pa)	3400
	CFM (125 Pa)	420
Thickness	(mm)	3,75
Square weight	(g/m <sup>2</sup> )	2520
Available seams	Spiral	


## Product description:

The most robust and durable heavy duty spiral fabric available on the market today. Fabric was especially designed for extremely abrasive applications and for high pressure belt presses. Improved edge reinforcement is guarantee of high edge mechanical resistance.

# FiltraDrain J6-64

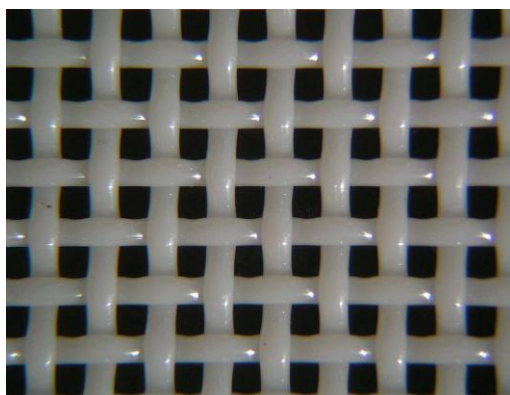

*Cake side*

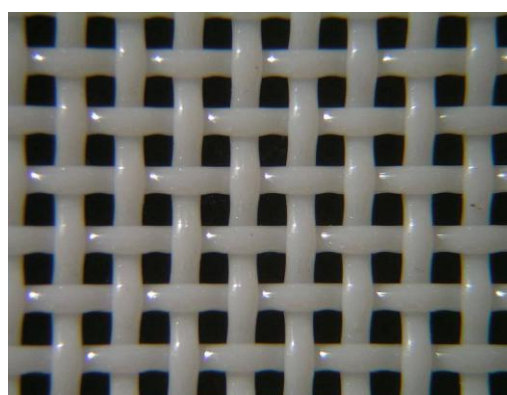


*Back side*

Weave		Plain Weave
Warp		0,6 mm PET
Weft		0,7 mm PET
Aperture	( $\mu\text{m} \times \mu\text{m}$ )	600 x 600
Air permeability	$\text{l/m}^2/\text{s}$ (200 Pa) CFM (125 Pa)	5200 640
Thickness	(mm)	1,1
Square weight	( $\text{g/m}^2$ )	806
Available seams		Stainless Steel Clipper Woven (endless belt)


**Product description:**

Filtration fabric with high flow rate .

# FiltraDrain J65-48

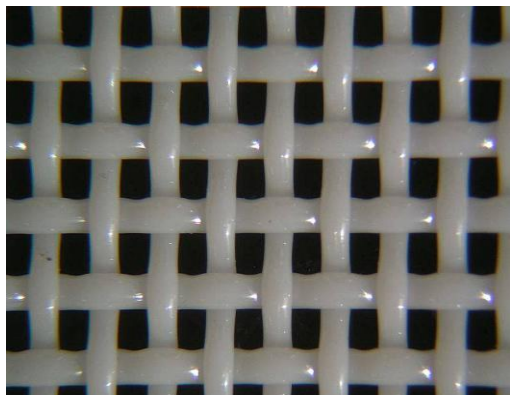

*Cake side*

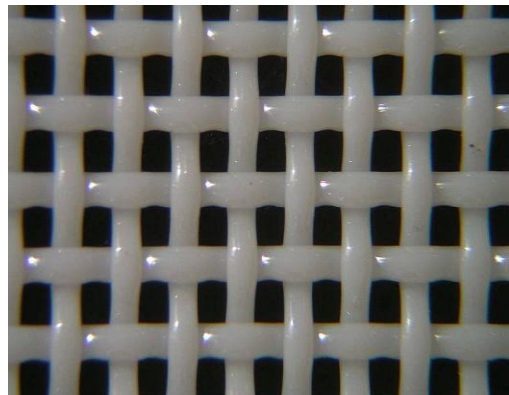


*Back side*

Weave		Plain Weave
Warp		0,6 mm PET
Weft		0,7 mm PET
Aperture	( $\mu\text{m} \times \mu\text{m}$ )	600 x 500
Air permeability	$\text{l/m}^2/\text{s}$ (200 Pa) CFM (125 Pa)	3900 480
Thickness	(mm)	1,3
Square weight	( $\text{g/m}^2$ )	997
Available seams		Stainless Steel Clipper Woven (endless belt)


**Product description:**

Filtration fabric with high flow rate .

# FiltraDrain J4-59

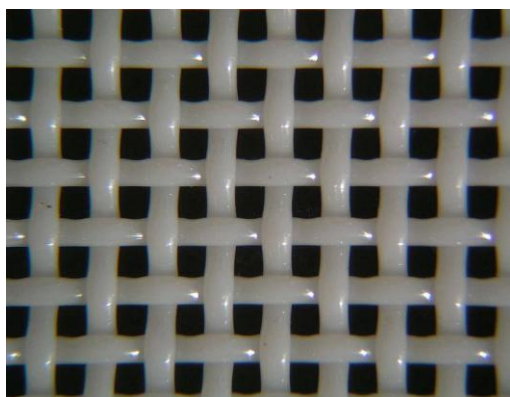

*Cake side*

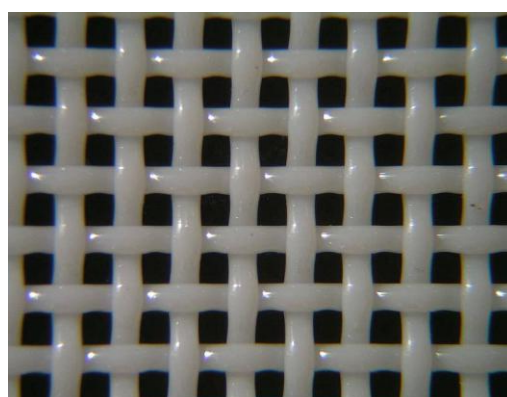


*Back side*

Weave		Plain Weave
Warp		0,45 mm PET
Weft		0,5 mm PET
Aperture	( $\mu\text{m} \times \mu\text{m}$ )	400 x 400
Air permeability	$\text{l/m}^2/\text{s}$ (200 Pa) CFM (125 Pa)	4800 590
Thickness	(mm)	0,85
Square weight	( $\text{g/m}^2$ )	588
Available seams		Stainless Steel Clipper Woven (endless belt)


**Product description:**

Filtration fabric with high flow rate .

# FiltraDrain J8-83

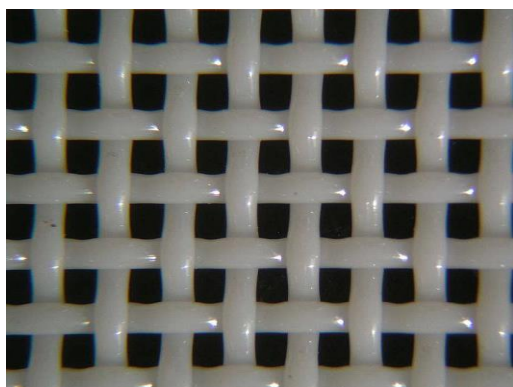

*Cake side*

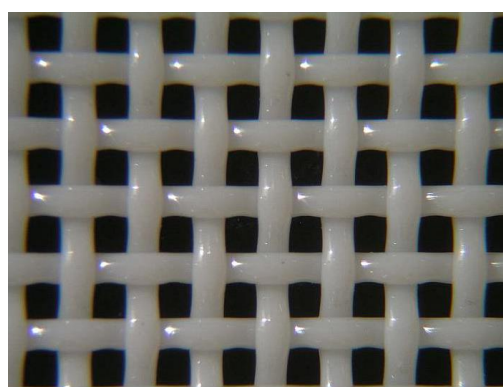

*Back side*

Weave		Plain Weave
Warp		0,7 mm PET
Weft		0,7 mm PET
Aperture	( $\mu\text{m} \times \mu\text{m}$ )	800 x 800
Air permeability	$\text{l/m}^2/\text{s}$ (200 Pa) CFM (125 Pa)	6700 830
Thickness	(mm)	1,32
Square weight	( $\text{g/m}^2$ )	774
Available seams		Stainless Steel Clipper Pin seam Woven (endless belt)

Product description:

Filtration fabric with high flow rate .

Availability: on request